

# KERN FCB 15K-3DM

# KERN

Checkweighing and portioning scale with up to three interfaces, with optional verification



	PCS %
Default unit	kg
Loadcell type	aluminium IP65 silicone-coated

Display	
Display type	LCD
Display backlight	✓
Display screen size	120×38 mm
Display digit height	25 mm
Languages of the user interface	English Symbol language

Construction	
Dimension housing (W×D×H)	322×267×91 mm
Dimensions completely mounted (W×D×H)	325×270×105 mm
Dimensions weighing surface (W×D)	252×225 mm
Dimensions weighing surface	252×225 mm
Material housing	plastic
Material weighing plate	stainless steel
Material display housing	plastic
Material load cell(s)	aluminium
Level indicator	✓
Levelling feet adjustable	✓
Transport safety lock - bolt torque	0,4 Nm

Functions	
Sum memory function	✓
Recipe/summing level	Sum A
Percentage determination	✓
Conversion function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	None
Alibi memory	internal memory
Alibi memory - number of memory spaces	250.000
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	30.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	500 mg

Category	
Brand	KERN
Product category	Industrial scale
Product group	Bench scale
Product family	FCB

Measuring System	
Weighing system	Strain gauge
Weighing capacity [Max]	6 kg; 15 kg
Readability [d]	0,002 kg; 0,005 kg
Reproducibility	0,002 kg; 0,005 kg
Linearity	± 0,002 kg; 0,005 kg
Minimum weight [Min]	0,04 kg
Conformity assessment possible	✓
Resolution	3.000, 3.000
Tare range	15 kg
Adjustment options	Adjusting with external weight
Recommended adjusting weight	15 kg (F2)
Possible calibration points	5 kg; 10 kg; 15 kg
Stabilization time	2 s
Eccentric loading at 1/3 [Max]	0,002 kg; 0,005 kg
Units (if device is conformity assessed)	kg g
Construction type of the scale	Multi-division balance
Units	kg g gn dwt ct lb oz ffa

# KERN FCB 15K-3DM



Checkweighing and portioning scale with up to three interfaces, with optional verification

Smallest piece weight when piece counting - normal conditions	5 g
Reference quantity	5, 10, 20, 50, free, Input
IP protection - complete device	-
IP protection - display	no IP protection
IP protection - load cell	IP65
Memory - total size	0,016 GB
Auto-off interval(s) in battery mode/rechargeable battery mode	2 min
	1 min
	30 min
	60 min
	30 sec
Tare function	manual (multi)
Number of keys for operation	6

Interface	
Interfaces	RS-232 (optional)
	Ethernet (optional)
	Alibi memory
	Bluetooth BLE (v4.0) (optional)
	USB-Device (optional)
	KUP
	WiFi (optional)
compatible with EasyTouch	✓

Power Supply	
Supplied power supply	Power supply unit
Power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	UK
	US
	CH
Input voltage power supply / power [Max]	100 V - 240 V AC, 50 / 60 Hz
Power supply cable removable	removable
Input voltage device / power [Max]	5,9V, 1A
Power socket for mains adapter	Hollow plug, inside plus, Ø outside 5,5 mm, Ø inside 2,1 mm, long 13 mm
Battery / accumulator type	Li-Ion
Battery operating time	20 h
Rechargeable battery operating time - backlight on	24 h
Rechargeable battery operating time - backlight off	48 h

Rechargeable battery charging time	8 h
Rechargeable battery optional	Rchrg. battery optional

Environmental conditions	
Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C
Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Approval	
CE mark	✓
Conformity assessment possible ex works	✓
Accuracy classe	III
Verification scale interval [e]	0,002 kg; 0,005 kg

Services (optional)	
Article number for adjustment at the location of installation	961-248
Article number for conformity assessment	965-228
Article number for DAkkS calibration	963-128
Article number for certificate of conformity	969-517

Packing & Shipping	
Delivery time	1 d
Dimensions packaging (W×D×H)	395×335×200 mm
Shipping method	Parcel service
Net weight approx.	3,8 kg
Gross weight approx.	4,6 kg
Shipping weight	5,3 kg

Product information	
GTIN/EAN number	404576 124352 1
Trade number	84238 129
REACH classification	no prohibited substances


# KERN FCB 15K-3DM



Checkweighing and portioning scale with up to three interfaces, with optional verification

## Pictograms

### STANDARD

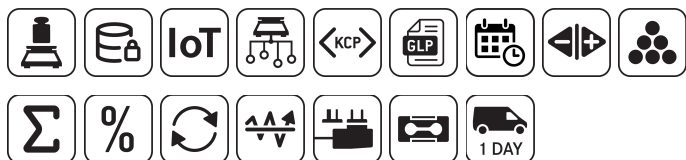

### OPTION



### FACTORY

