



# BH3

High Precision Weighing Balance

# BH3


## High Precision Weighing Balance

### Features:

- 1/30,000 and 1/60,000 display resolutions available
- Digital calibration
- LCD display with LED backlight, more durable, more energy saving
- Auto zero tracking, double overload protection
- Weighing, Counting, and Percentage modes
- Selectable weighing units, up to 13 weighing units available
- Auto temperature and linearity compensation
- A/D sampling speed setting
- Adjustable gravity value
- Selectable default weighing units
- Low power indication and auto power off
- Both plug and dry battery models available
- Excellent protection for transportation
- Built-in bi-directional RS232 interface
- Plastic shield for protection
- Easily adjusted leveling feet for stability of the scale

### Option:

- RTC card

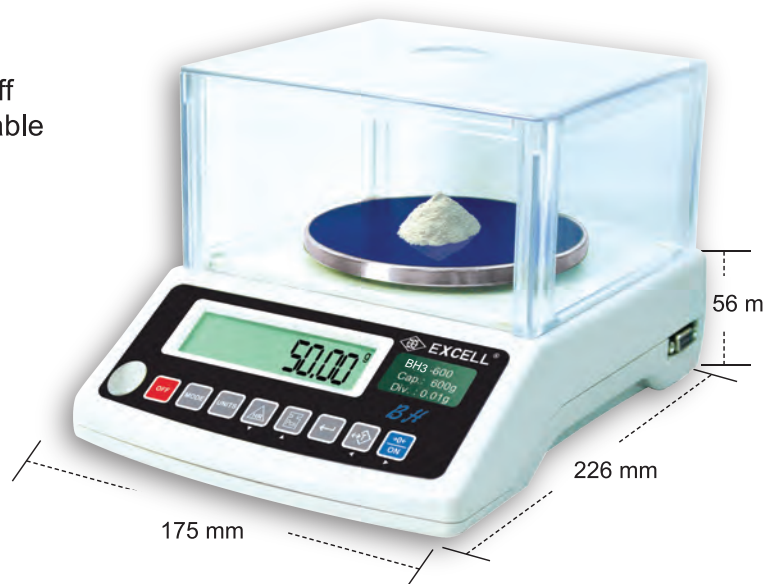

### Specifications:

Model	Capacity	Division
BH3- 150	150g	0.005g
BH3- 300	300g	0.005g
BH3- 600	600g	0.01g/0.02g
BH3- 1200	1200g	0.02g
BH3- 1500	1500g	0.05g
BH3-3000	3000g	0.05g/0.1g

**Operating Temperature:** 0°C~40 °C ( 32°F~104°F )

**Power Source:** Adaptor DC 9V/300mA or 4 x UM-2 dry battery (not included)

**Dimensions:** 175 x 56x 226 mm (W x H x D)

**Platter Size:** Square: 144 x 124 x 6.5 mm Round: Ø116 mm

**Display:** LCD 6 1/2 digits, 16 mm (Height), LED backlight



### EXCELL PRECISION CO., LTD.

6F, No.127, Lane 235, Pao-Chiao Road, Hsin Tien Dist., New Taipei City, 231, Taiwan

Tel: +886-2-89191000

Website: [www.excell-scale.com](http://www.excell-scale.com)

Fax: +886-2-89191177

E-mail: [sales@excell-scale.com](mailto:sales@excell-scale.com)