



FDH3-C

High Resolution Counting Scale






FDH3-C

High Resolution Counting Scale

Feature:

- FDH3-C up to 1/30 000 display resolution
- High speed 24bits AD
- Fast weighing stability and zero return
- Faster Zero key and Tare key reaction
- LCD display full tare (Weight-6digits, Unit Weight-6 digits, Quantity-6 digits)
- 10 preset unit weight function
- Auto calibration function, OL protection
- Weight and quantity over-limit warning
- Auto average unit weight, pre-tare function
- Kilogram(kg), pound(lb) weighing modes
- Stable sampling range setting function
- Data accumulations (weight and quantity)
- Low power and charging status indication
- Built-in rechargeable battery
- Water channel designed underneath the platter to give a better protection against water running into the scale
- Unique sealing rings designed to prevent dust, dirt, cockroaches and water from entering the scale, thereby improving reliability and hygiene
- Special design for power switch prevents moisture getting inside the scale for better performance stability and reliability
- Special sunken power coil outlet design to prevent water running into the socket to improve safety and reliability
- Easily adjusted leveling feet for stability of the scale

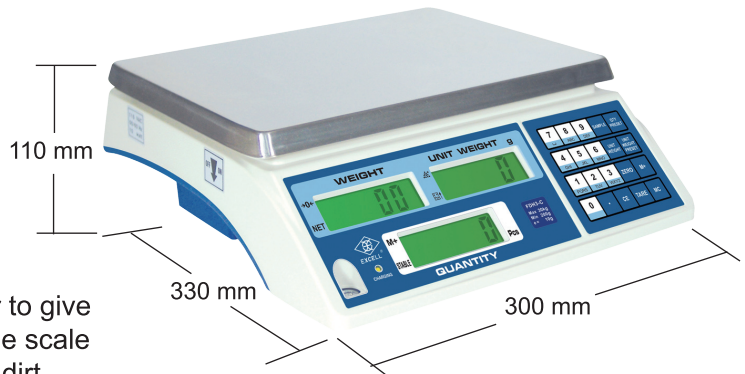

Option:

- RS232: Bi-direction transmission, easy data reading or printing
- RS232-F: Free form card (include Real Time Clock)
- OIML approved model available for 1/3 000 display resolution
- 1/30 000 with temperature compensation component more accurate and stable

Specifications:

Model	Capacity	Division	Resolution
FDH3-C - 1.5	1.5 kg (3 lb)	0.1 g (0.0002 lb)	1/15 000
FDH3-C - 3	3 kg (6 lb)	0.2 g (0.0005 lb)	1/15 000
		0.1 g (0.0002 lb)	1/30 000
FDH3-C - 6	6 kg (12 lb)	0.2 g (0.0005 lb)	1/30 000
FDH3-C - 7.5	7.5 kg (15 lb)	0.5 g (0.001 lb)	1/15 000
FDH3-C -15	15 kg (30 lb)	1 g (0.002 lb)	1/15 000
		0.5 g (0.001 lb)	1/30 000
FDH3-C - 30	30 kg (60 lb)	2 g (0.005 lb)	1/15 000
		1 g (0.002 lb)	1/30 000

Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F); **Approval Model:** -10°C ~ 40°C (14°F ~ 104°F)

Power Source: AC 110V/220V (±10%) + DC 6V/4AH rechargeable battery

Dimensions: 300 × 110 × 330 mm (W × H × D)

Platter Size: 300 × 225 mm (W × D)

Display: LCD. 6, 6, 6 Digits, Height 18 mm, LED Backlight



EXCELL PRECISION CO., LTD.

6F, No.127, Lane 235, Pao-Chiao Road, Hsin Tien, Taipei Hsien, 231, Taiwan
 Tel: +886-2-89191000 Website: www.excell-scale.com
 Fax: +886-2-89191177 E-mail: sales@excell-scale.com